

NSR Fire-fighter's portable radiotelephone:

- Meet IMO MSC.338 (91) regulation
- Designed for onboard fire-fighter's communication
- Ex-proof certificated
- Type approval with CCS



According to IMO MSC.338 (91) & SOLAS Chapter II-2, regulation 10.10.4:

Fire-fighter's communication

A minimum of TWO two-way portable radiotelephone apparatus for each fire party for fire-fighter's communication shall be carried on board. Those two-way portable radiotelephone apparatus shall be of an explosion-proof type or intrinsically safe.



SPECIFICATIONS


● FREQUENCY & CHANNEL

- Frequency Range: 156.025~157.425 MHz (TX)
156.050~162.000 MHz (RX)
- Channel Space: 25 kHz
- Usable Channels: 19 channels (default)

● TECHNICAL FEATURE

- Output Power: High 3.0 W / Low 0.5 W
- Communication Methods: Simplex
- Warming Up Time: Within 5 sec
- Squelch Control: ✓
- Dual Watch: ✓
- Key Locking: ✓
- Battery Save Mode: ✓
- Beep Establishment: ✓
- Location Indication: ✓
- Ex Code: Exib IIB T4 Gb
- Battery Capacity: 2200 mAh
- Battery Voltage: DC 7.2 V
- Operating Temperature: -20°C~+60°C
- Size: 256 (H)×56 (W)×46.2 (D) mm
- Weight: 250 g (Transceiver + Antenna + Battery)

SIZE DIMENSION

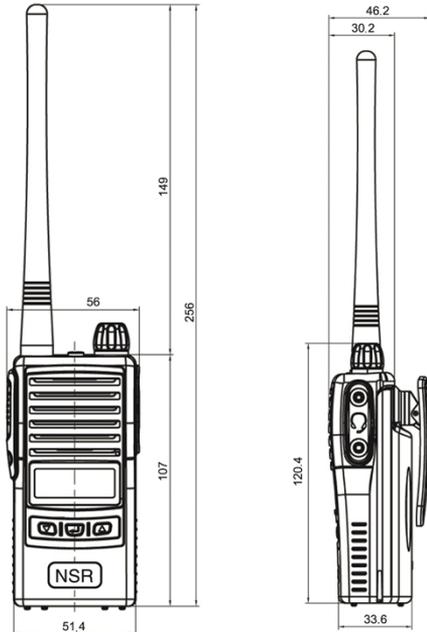

EQUIPMENT LIST

● STANDARD

- | | | |
|-----------------------------|-----------|-------|
| - Transceiver & Antenna | ZXF-N2000 | 1 set |
| - Rechargeable Battery Pack | NBT200CX | 1 pc |
| - Battery Charger | NBT200CU | 1 pc |
| - AC/DC Adaptor | NBT200CUA | 1 pc |
| - Belt Clip | | 1 pc |
| - Wrist Rope | | 1 pc |

● OPTIONS

- | | | |
|------------------------------------|------------|-------|
| - External PTT & Skull Mic/Headset | ZXF-HM1000 | 1 set |
|------------------------------------|------------|-------|



Rechargeable
Battery Pack



Belt Clip



Battery Charger



AC/DC Adaptor



Skull Mic/Headset



Wrist Rope



External PTT

